


Dehn Isolating Spark Gap (EXFS 100)




EXFS 100 isolating spark gaps Isolating spark gap for use in hazardous zones (Zone 1) with plastic coating and threaded M10 sockets.

- For indirect connection/earthing of functionally isolated parts of installations under lightning conditions
- Device for lightning equipotential bonding according to IEC 62305 in hazardous areas
- Approval according to ATEX Directive 94/9/EC and IECEx

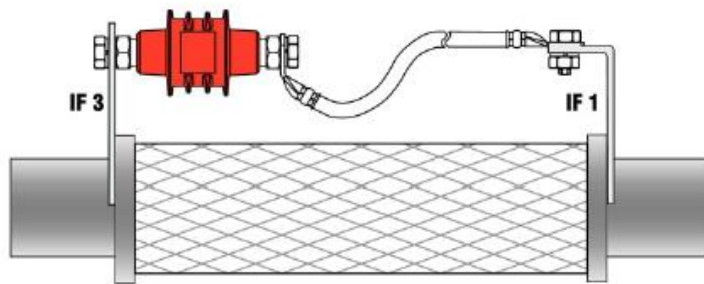

Connection cable Cu 25 mm² for EXFS 100. Connection cable for EXFS 100 with cable lug for M10 bolt, M10 screw, Stainless steel nut and spring washer. Available cable length: 100, 200 or 300 mm

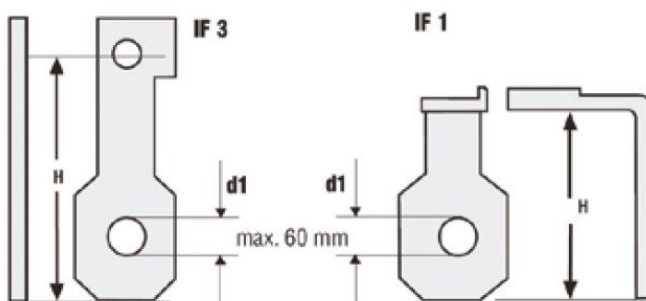

Size	IF 1	IF 3
1	H = 0.08 m	H = 0.10 m
2	H = 0.10 m	H = 0.12 m
3	H = 0.14 m	---