

Cathodic Protection (CP)





Copper-Copper Sulfate Reference Electrode



ProCell Copper-Copper Sulfate Reference Electrode (CSE) is one of the most reliable and proven electrodes used for soil applications. Long-stable life and performance is achieved by the specially designed porcelain cup and backfill.

- Design life: a minimum of 30 years.
- 99.99 % copper element.
- +/- 10 mV over 24 hours at 25 °C
- Operating temperature range: 0 °C to 55 °C.
- Great durability for construction.

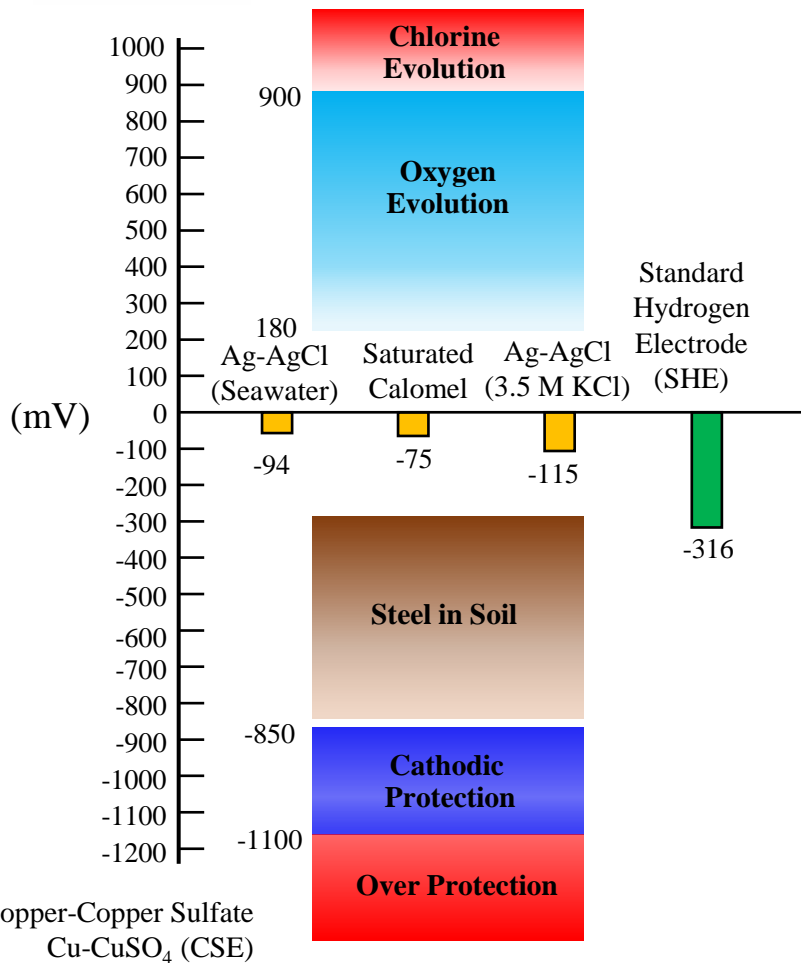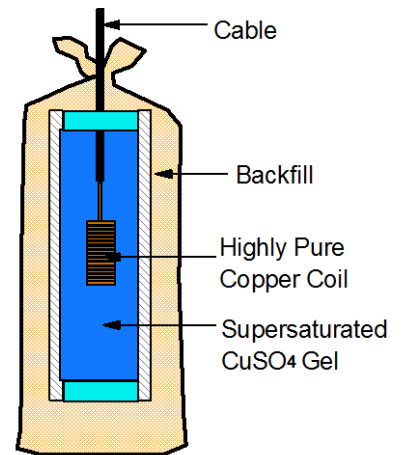

Note: various cable types, sizes and colors are available upon your request.