

Cathodic Protection (CP)




Zinc Reference Electrode



ProCell prepackaged zinc reference electrode is designed for use in the soil environment. The electrodes are more robust and may be used in applications where a high degree of stability is not required. Typical accuracy figures of $\pm 30\text{mV}$ may be expected.

- Dimension: 38 mm Dia. x 150 mm L
- Design life: a minimum of 30 years.
- High Purity Zinc (ASTM B418-73 Type II)
- +/- 30 mV over life time
- Great durability for construction.

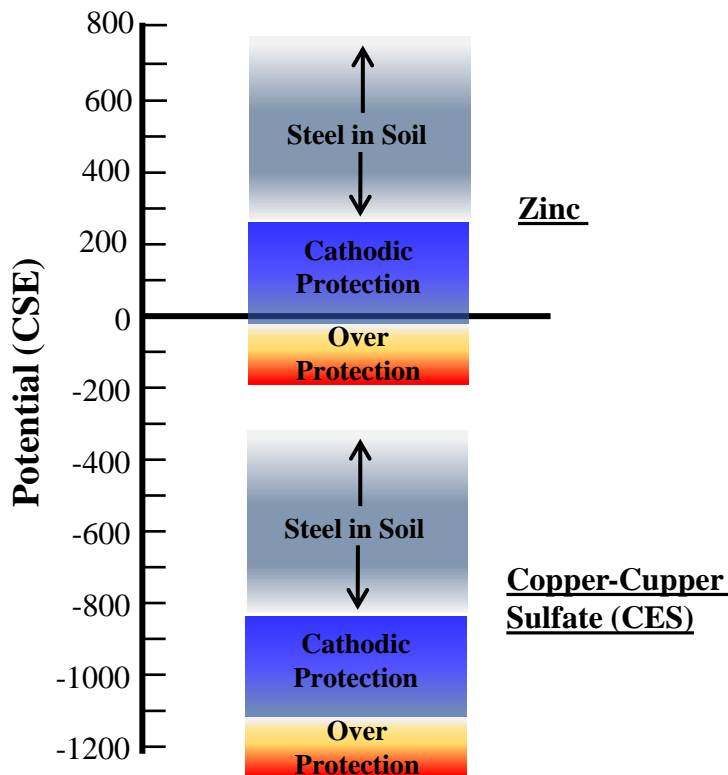

Chemical Compositions

Aluminum:	0.0001 % max
Cadmium:	0.0001 % max
Iron:	0.0003 % max
Copper:	0.0002 % max.
Lead :	0.002 % max.
Zinc:	Remainder

Note: various cable types, sizes and colors are available upon your request.